


# System FSC 4

Easy-to-install fire protection collar for sealing combustible pipes of small to medium diameters.

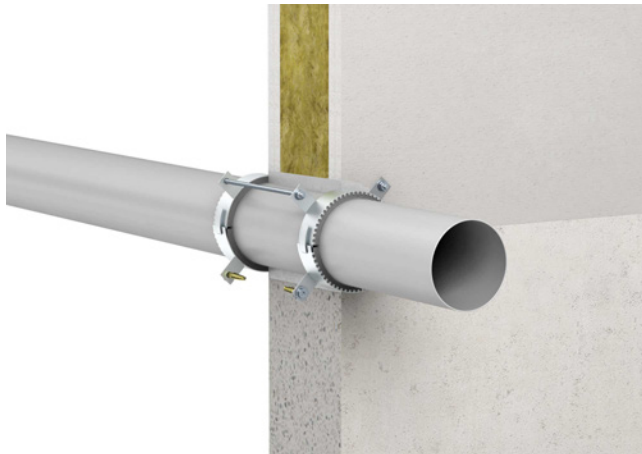

## Fire Resistance Class

max. EI 240 U/C in acc. with EN 13501-2

## Field of Application


- plasterboard walls, solid walls, solid floors

## System Data

<b>Certificate of usability</b>		ETA-15/0907
<b>Thickness of building element</b>	Wall	≥ 100
	Floor	≥ 150


All specifications in mm


## Services

	Brennbare Rohre	max. Ø ≤ 160
---	-----------------	-----------------

All specifications in mm

## Products

	<b>FSC 4</b> Fire protection collar
<b>Dimensions [mm]</b>	<b>Art. no.</b>
50	01148050
63	01148063
75	01148075
90	01148090
110	01148110
125	01148125
140	01148140
160	01148160

	<b>Fasteners</b>
<b>Dimensions [mm]</b>	<b>Art. no.</b>
Ø 32–50 mm	01146050
Ø 63–125 mm	01146125
Ø 140–160 mm	01146160



**GFM**  
Fire protection mortar

25 kg bag – Art. no. 01167000