


## System Flammotect 4 × 60 mm

Mixed penetration sealing system made of mineral fibre boards (4 × 60 mm) with ablative fire protection coating

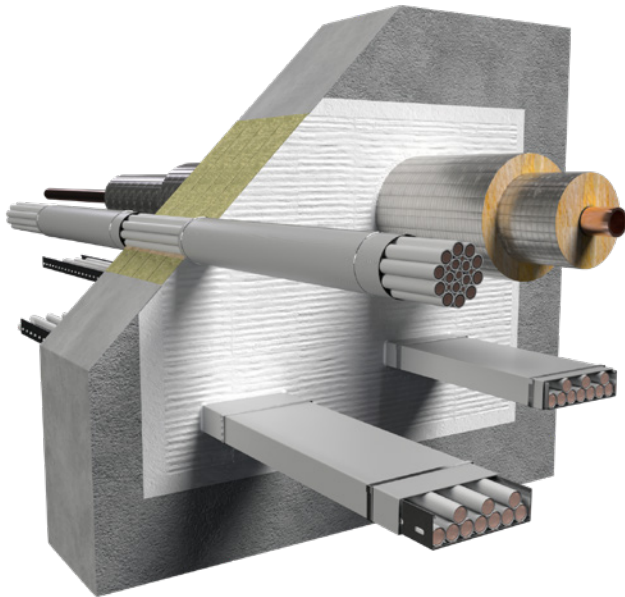

### Fire Resistance Class

max. EI 240 in acc. with EN 13501-2

### Areas of Application

- Rigid wall, rigid floor

### Services

		max. Ø
	Cables	≤ 80
	Cable bundles	≤ 100 / ≤ 21
	Cable trays	✓
	Non-combustible pipes (steel, stainless steel, cast iron)	≤ 323.9

\* All specifications in mm

### System Data

<b>Certificate of usability</b>	ETA-22/0052	
<b>Thickness of structural element</b>	Rigid wall	≥ 240
	Rigid floor	≥ 200
<b>Sealing thickness</b>	All building elements	≥ 240
<b>Maximum sealing size</b>	Rigid wall	Cables: 600 × 600 Pipes: 400 × 400
	Rigid floor	600 × 1000 / 375 × ∞

All specifications in mm

## System Flammotect 4 × 60 mm

### Products



#### FLAMMOTECT-A Coating

5 kg pail – Art. no. 01155132  
12.5 kg pail – Art. no. 01155131




#### FLAMMOTECT-A Solid emulsion

5 kg pail – Art. no. 01155121  
12.5 kg pail – Art. no. 01155136




#### FLAMMOTECT-A Filler

5 kg pail – Art. no. 01155135  
12.5 kg pail – Art. no. 01155134  
310 ml cartridge – Art. no. 01155115  
600 ml flow pack – Art. no. 01155153



#### DG-CR 1.5 Fire protection wrap

Roll, 10 m – Art. no. 01261931




#### DG-CR 0.7

**Fire protection cable bandage**  
Roll, 10 × 1100 mm – Art. no. 01260110  
Roll, 20 × 1100 mm – Art. no. 01260231

**Metal strap**  
100 × 15 mm – Art. no. 01234000

**Fastening clamps**  
1000 pcs. – Art. no. 01234100



#### Mineral fibre boards

pre-coated on one side with  
FLAMMOTECT-A  
Dimensions 1000 × 600 × 60 mm  
Box with 4 pcs. – Art. no. 01182165



#### Mineral fibre board in acc. with EN 13162

Criteria: density  $\geq 150 \text{ kg/m}^3$   
Reaction to fire class A1 in acc. with  
EN 13501:1  
Melting point  $\geq 1000 \text{ }^\circ\text{C}$ .  
(TR10) tensile strength vertical to board  
surface  $\geq 10 \text{ kPa}$  according to EN 1607  
Thickness  $\geq 60 \text{ mm}$





#### Label

1 piece – Art. no. 14003

# System Flammotect 4 × 60 mm

## Design Variants

Rigid wall and floor

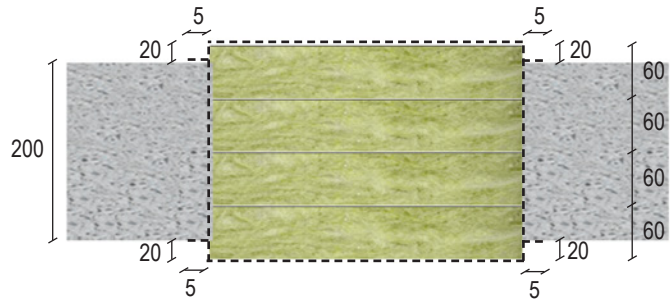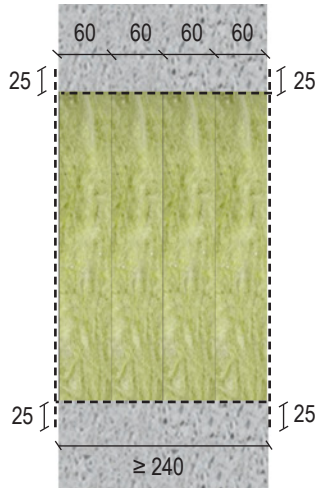

----- = Coating with FLAMMOTECT-A (dry film thickness ≥ 2.0)

All specifications in mm