

FSC 4 Fire Stop Collar


Collars

Description

Simple fire protection collar for use on combustible pipes without insulation.

Application Areas

- For use in plasterboard walls, solid walls and floors.
- Suitable for standard pipes up to medium diameter.

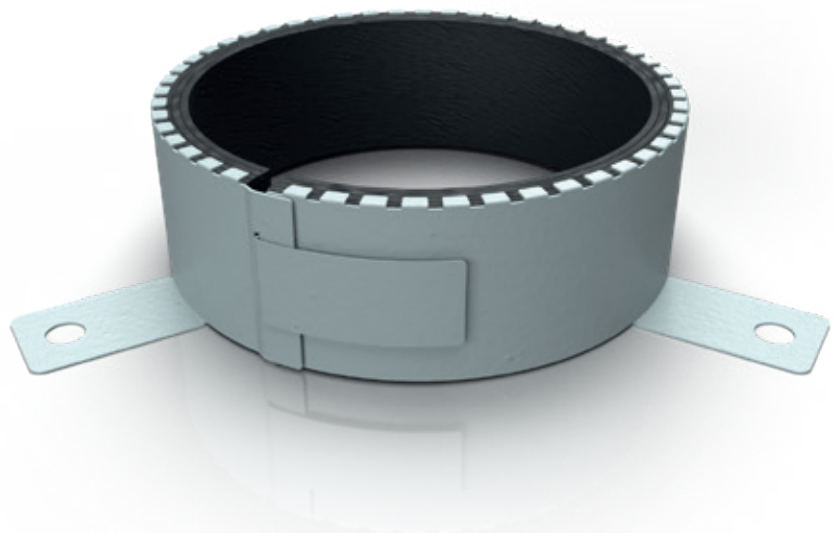

Delivery and Packaging

FSC 4 Fire Stop Collar	
Packaging	Pc.
Diameter [mm]	Item number
Ø 50 mm	01148050
Ø 63 mm	01148063
Ø 75 mm	01148075
Ø 90 mm	01148090
Ø 110 mm	01148110
Ø 125 mm	01148125
Ø 140 mm	01148140
Ø 160 mm	01148160

FSC 4 Fire Stop Collar

Technical Data

Material	<ul style="list-style-type: none"> galvanized sheet steel housing flexible intumescent strip with self-adhesive device
Colour	<ul style="list-style-type: none"> silver gray (housing) anthracite (inlay)
Usage category	Type Y1 in acc. with EOTA TR024
Storage	Dry indoors.
Safety information	Please observe the safety data sheet.

Dimensions

Collar size Ø	Internal Ø D2	External Ø D1	Installation height H1	Number of tabs [n]
50	52	61,2	42,5	2
63	65	78,2	42,5	3
75	77	90,2	42,5	3
90	92	109,2	42,5	3
110	112	129,2	42,5	3
125	127	148,2	42,5	4
140	142	167,2	42,5	4
160	162	187,2	42,5	4

All specifications in mm

